

DIRECT SOLAR WATER HEATERS

6/6 or 12/12 - Year Limited Tank and Parts Warranty

SunEarth™ direct solar water heaters are designed for installation as a part of a direct (open loop) solar water heating system or for use with external heat exchangers in closed loop systems. Available in 65, 80 and 119-gallon capacities these models provide storage for the hot water produced by the solar collectors and a supplementary electric heating element that maintains consistent water temperature during periods when solar energy is not available.

Multiple Connection Options for Installation Flexibility

 Side and top connections for open loop systems or closed loop systems using an external heat exchanger

Electrical

- 4500 watt heating element long lasting low-watt density design spreads wattage over larger surface area to prolong element life and maximize efficiency
- 12-yr model features gold plated element
- Pre-wired for surface mount temperature sensor (sensor supplied separately)

Tank Construction

- Glasslined SteelTank glasslining protects against corrosion to maximize tank life
- 2-inch thick "Environmentally-Friendly" Non-CFC Foam insulation (R16 Value) reduces standby heat loss

Anode Rod

- A single magnesium anode rod with stainless steel core protects tank against corrosion in the 65 and 80 gallon models
- The 119 gallon model features two magnesium anode rods for added protection

CSA Certified and ASME Rated T&P Relief Valve

Durable Tamper-Resistant Brass Drain Valve

Compliance

 Units are UL and cUL listed to UL 174 Standard for Household Electric Storage Tank Water Heaters and CAN/CSA-C22.2 No. 110-M90; Complies with California legislation AB 1953 and Vermont legislation Act 193 that limits the lead content in plumbing fixtures that come into contact with drinking water to a maximum of 0.25%

6/6 or 12/12 - Year Limited Tank and Parts Warranty

 For complete warranty information consult written warranty supplied with the product or call SunEarth at 909-434-3100

12 Year Tank Features

- Two Magnesium Anode Rods
- Gold Elements








Eligible for a 30% federal tax credit through 2016 when installed as part of a complete solar water heating system.

July 2014 SE71301



RESIDENTIAL ELECTRIC DIRECT SOLAR WATER HEATERS

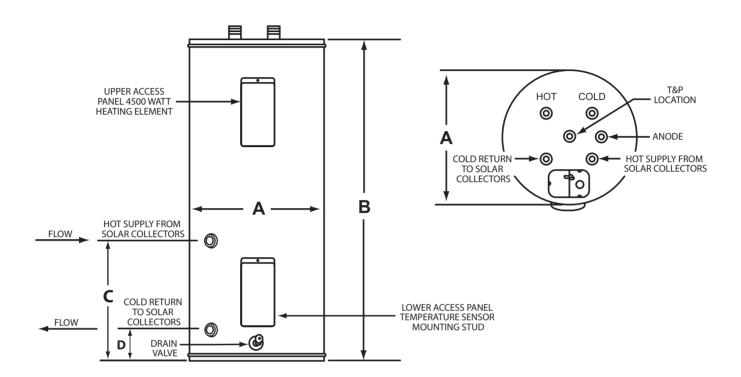

MODEL Number	GALLON CAPACITY	NUMBER OF HEATING ELEMENTS	ELEMENT WATTAGE (240 VOLT)	GALLONS ABOVE HEATING ELEMENT	RECOVERY GALLONS PER HOUR (90°F RISE)	INSULATION R Value	HEIGHT WATER CONNECTION	JACKET DIAMETER A	HEIGHT TOP OF TANK B	OPTIONAL SOLAR IN/DOWN C	OPTIONAL SOLAR OUT/UP D	APPROX. Shipping Weight
SE65-6*	65	1	4500	18.5	21	16	60-1/4	22	59-1/4	20-1/2	7-1/2	152
SE80-6*	80	1	4500	22.5	21	16	60-1/4	24	59-1/4	20-1/2	7-1/2	191
SE120-6*	119	1	4500	27.8	21	16	62	28	61-1/2	20-1/2	7-1/2	278

^{*}For 12 year tank and parts warranty models - change last digit (6) of model number to 12. Recovery based on heating element performance.

All dimensions in inches.

All solar loop and domestic water connections are 3/4" NPT. Top solar loop and domestic water connections are male NPT with factory-installed dielectric pipe nipples. Side solar loop connections are female NPT and are plugged from the factory.

July 2014 SE71301